


RIPEUR 2

G1A LINE

HIGH CUT PROTECTION

- Handling in wet and greasy environments
- Glass handling
- Waste collection
- Outdoor works : gardens, roadways, brush cutting

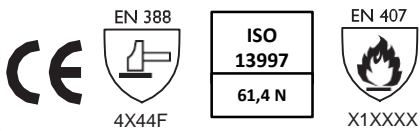

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

AET N° 0075/011/162/05/18/0786 (CTC LYON)

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-securite

SIZES

6 7 8 9 10 11 12

COMPOSITION

Glove Oil-proofed & water-proofed cow split leather
Lining TEKINOX® weave knitted glove
Cuff Cotton canvas
Total length 27 cm

CARE



PACKAGING

Bag of 5 pairs – Box of 50 pairs

PRO•LINE :
Our selection



Suitable for oily and humid environments



Excellent resistance to perforation

Cow split leather in palm



Optimum cut protection

Technological weave

TEKINOX®
ROSTAING



Contact heat resistance

Thermal insulation :
100 °C for 15 seconds minimum



Vein patch

